

## **GENERAL NOTES**

DETAILS OF INSTALLATION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.



HANDICAP SYMBOL

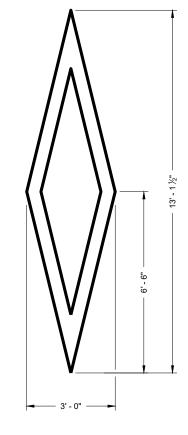

PREFERENTIAL LANE SYMBOL

6

5a -**SDD15C07** 


## **PAVEMENT MARKING SYMBOLS**

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION

APPROVED November 2019 DATE


/S/ Matthew Rauch STATE SIGNING AND MARKING ENGINEER

# SDD 15C07-b Pavement Marking Words

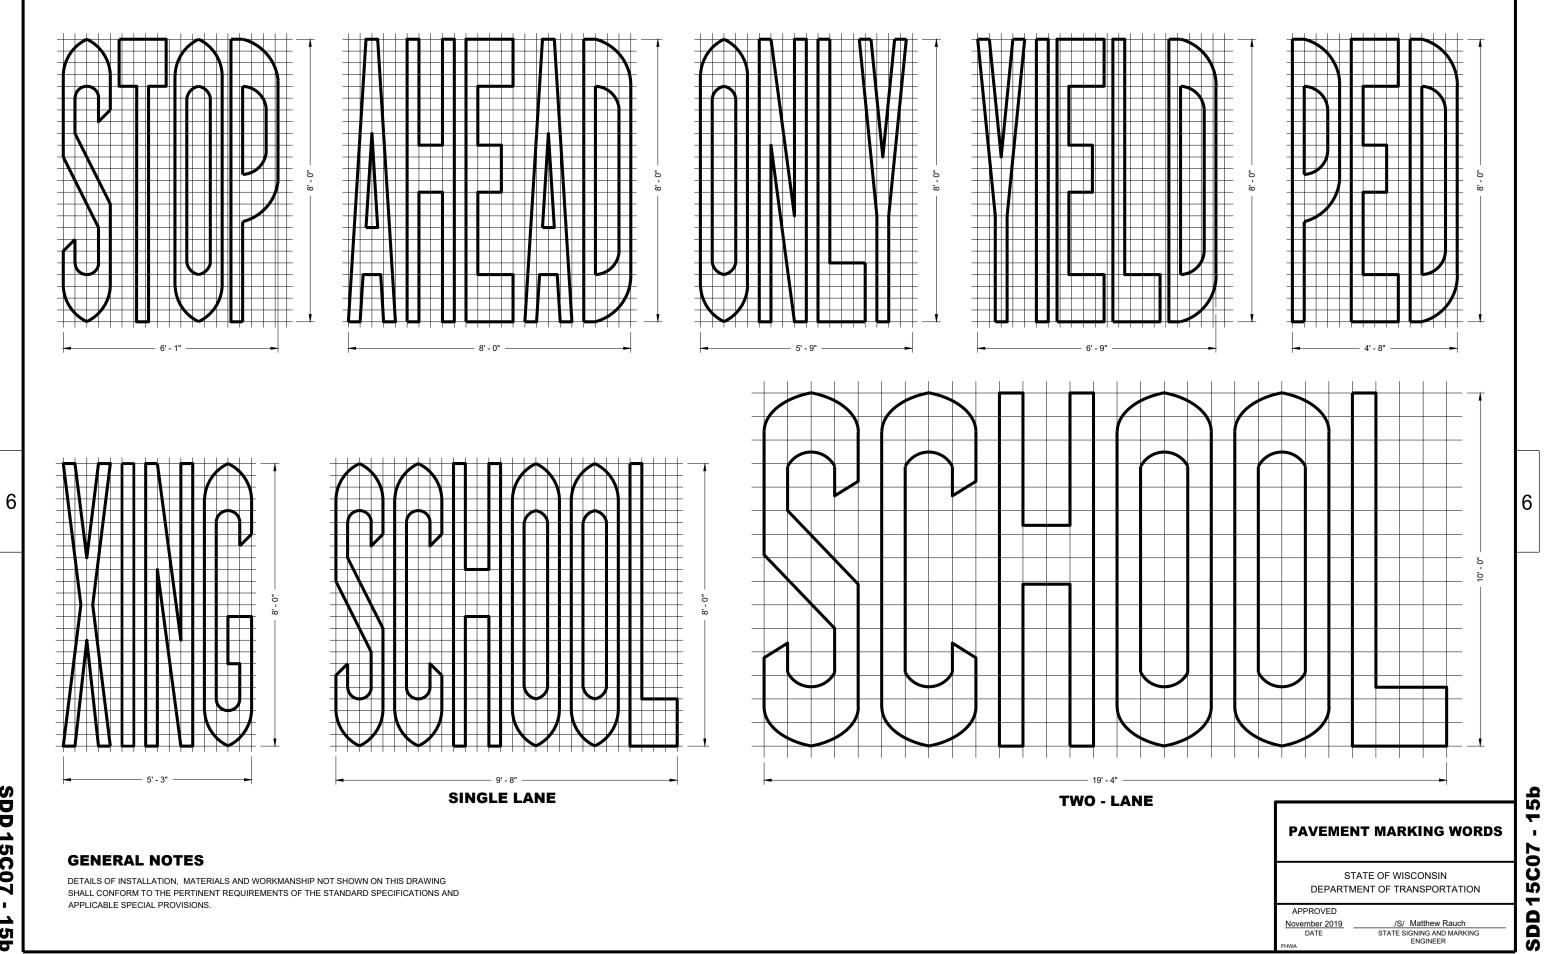


S
Ū
Ū
-
<b>_</b>
G
0
~ / /
<u> </u>
0
_
4
G
5


# SDD 15C7-c Pavement Marking Arrows

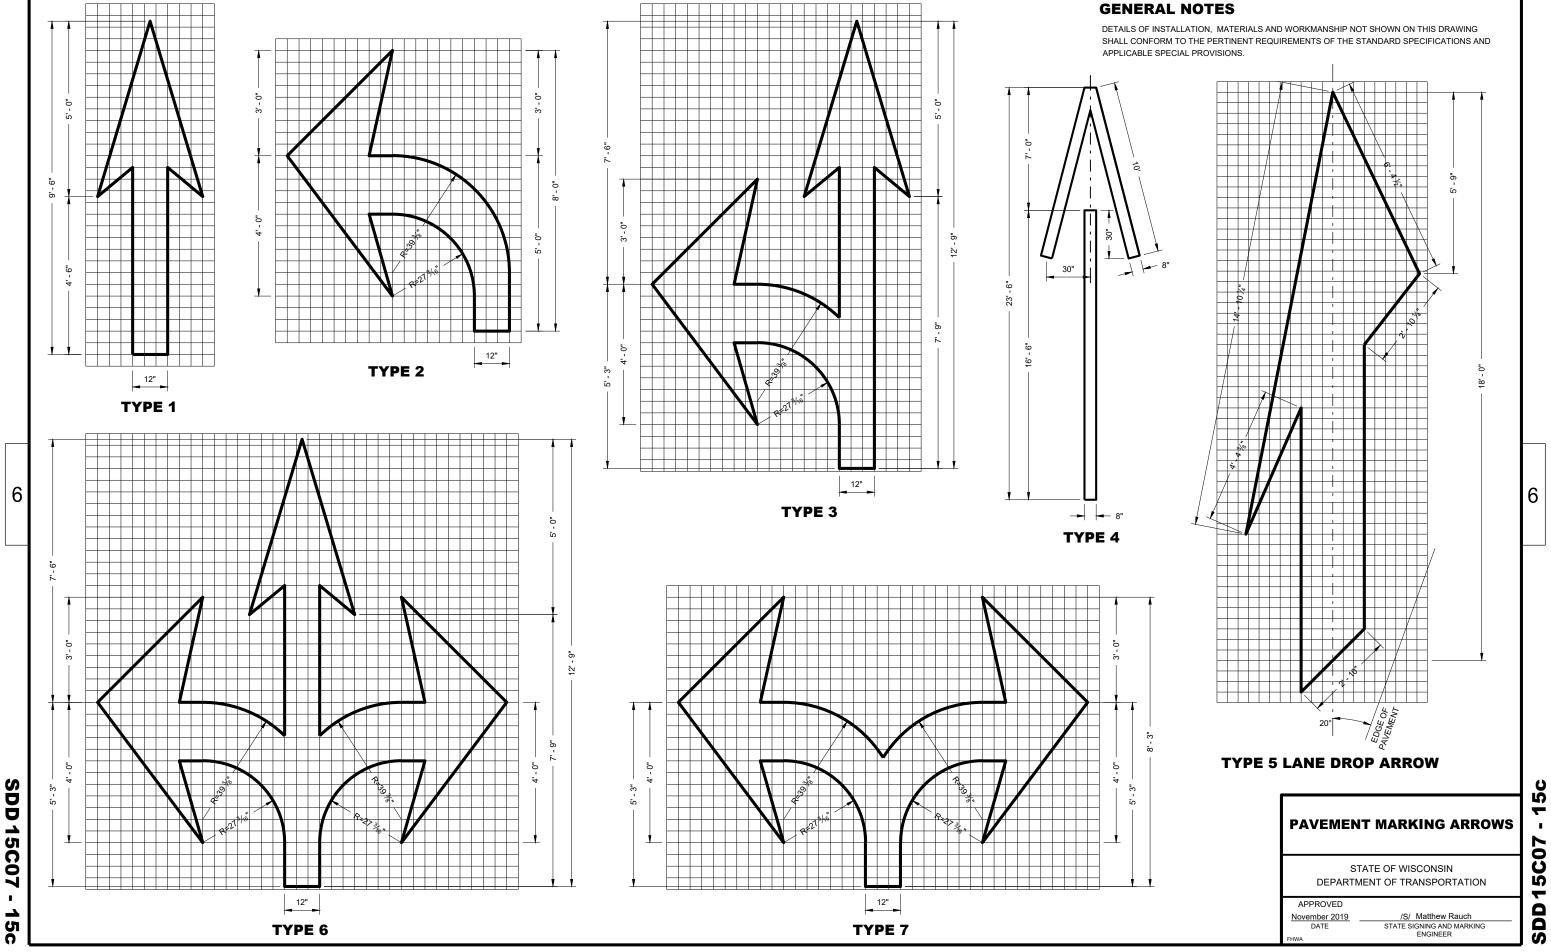


## SDD 15C7-d Roundabout Marking Arrows


## **GENERAL NOTES**



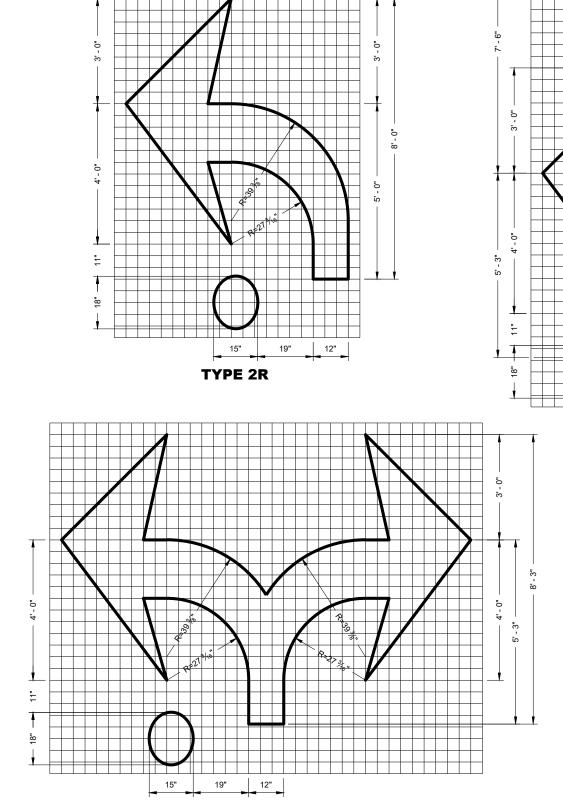

TYPE 7R

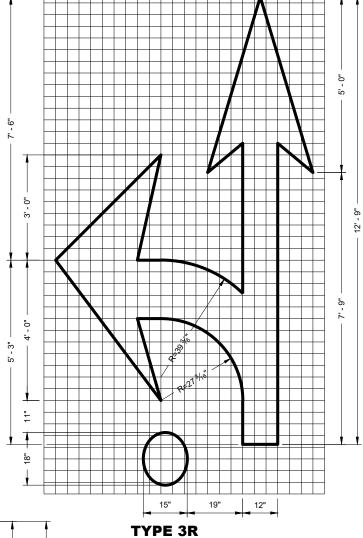


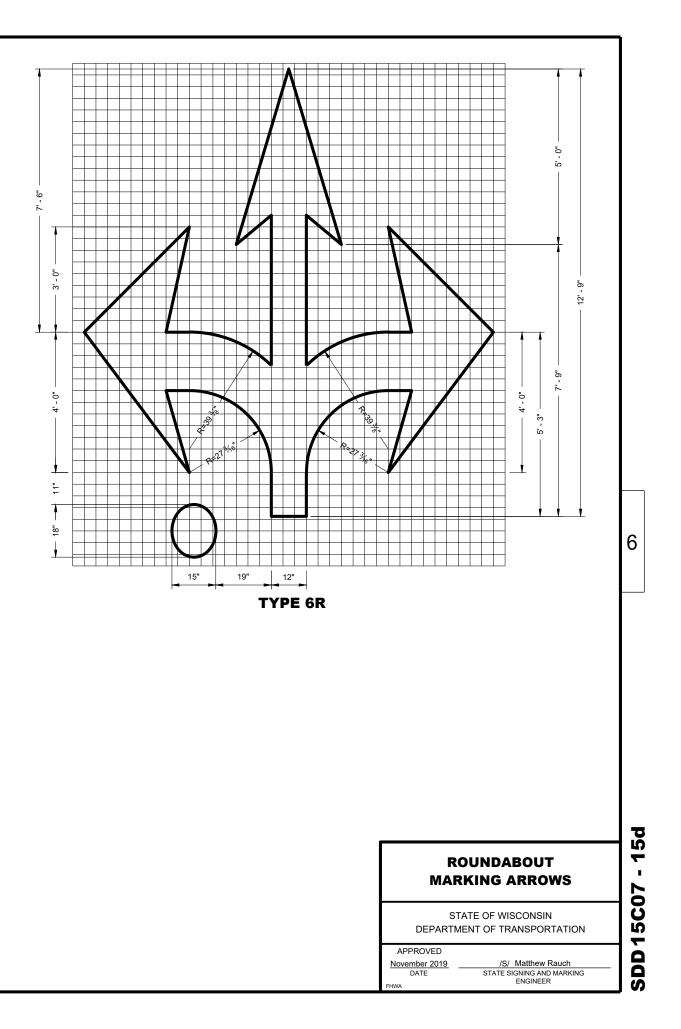


SDD 15C07 - 15d

6


# SDD 15C7-e Pavement Marking For Bike Lanes

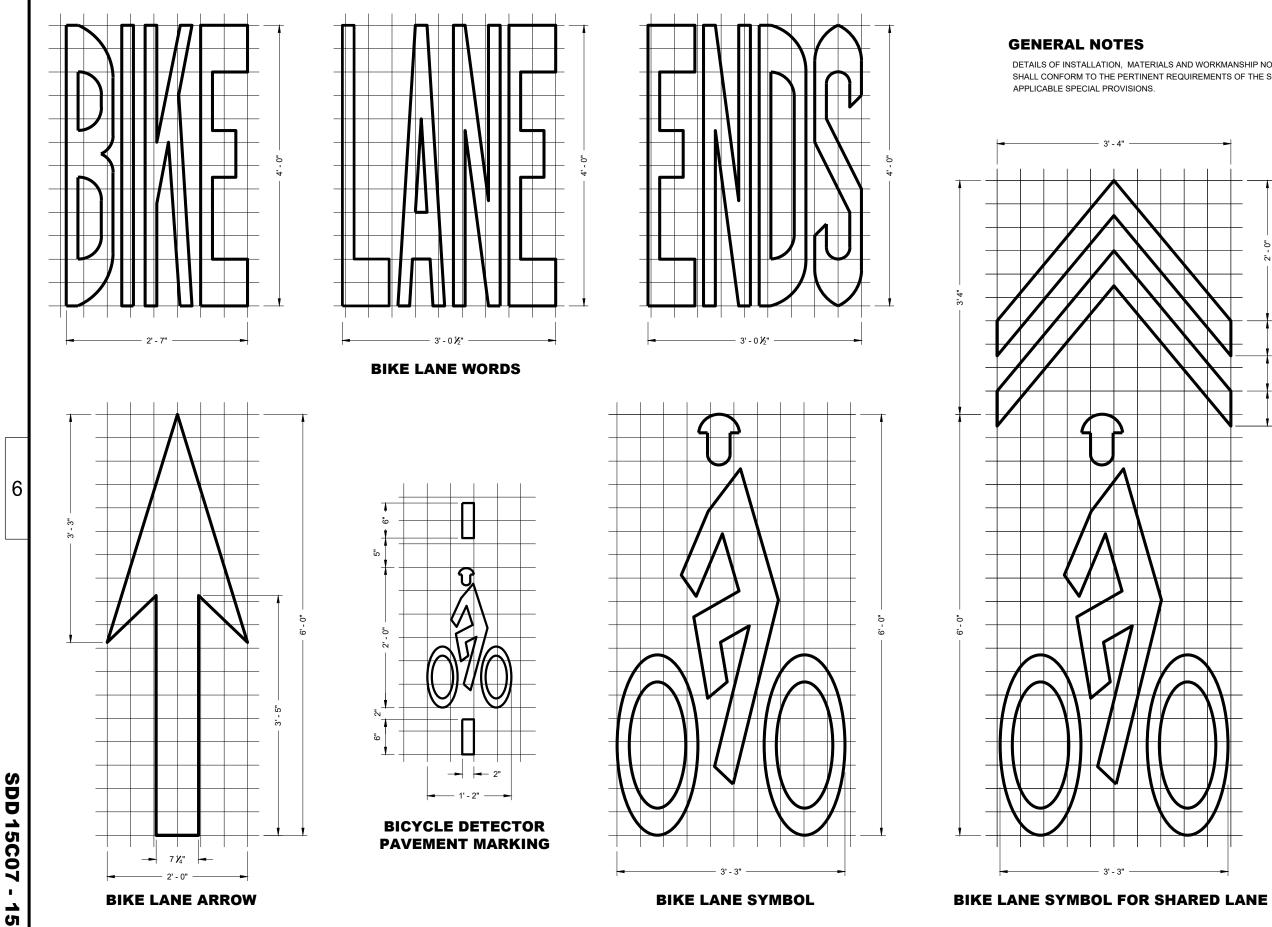

н. 15e

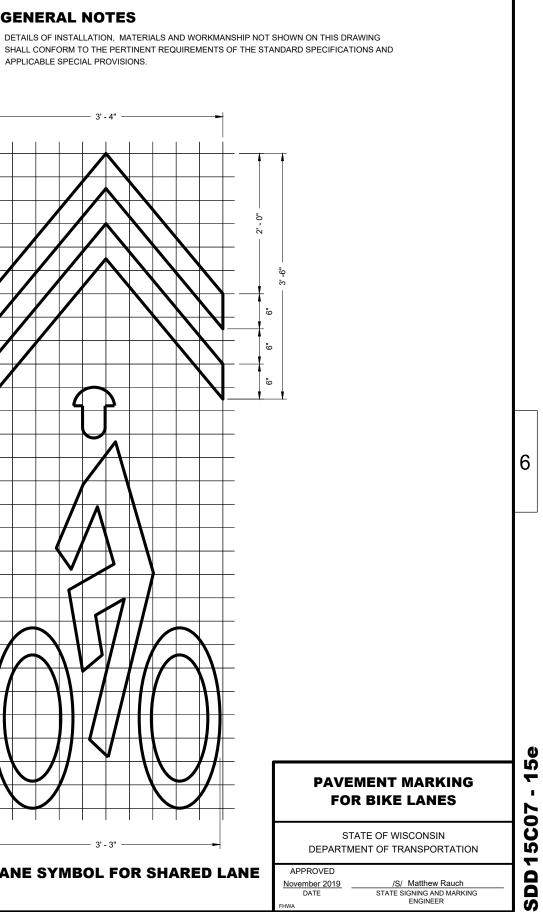

STATE SIGNING AND MARKING ENGINEER

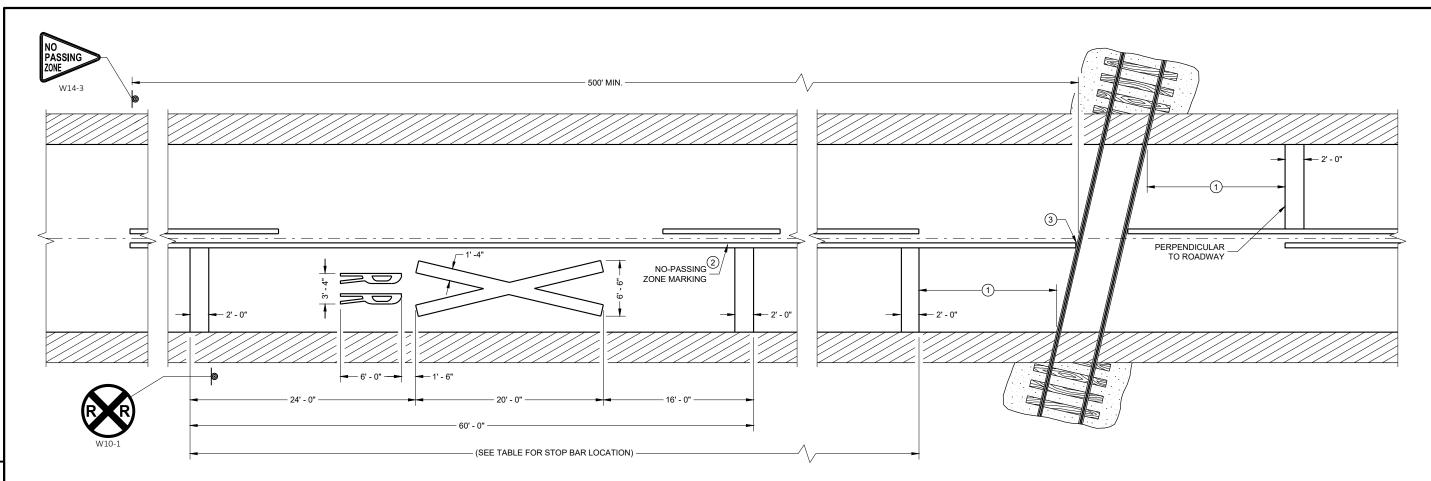

**PAVEMENT MARKING** 

#### LEGEND

SIGN ON PERMANENT SUPPORT

#### **GENERAL NOTES**

DETAILS OF CONSTRUCTION, MATERIALS, AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

ON MULTI-LANE ROADS THE TRANSVERSE BANDS SHOULD EXTEND ACROSS ALL APPROACH LANES, AND INDIVIDUAL R X R SYMBOLS SHOULD BE USED IN EACH APPROACH LANE.

CENTER OR LANE LINES AND NO-PASSING ZONE MARKINGS SHOWN ON THIS DRAWING ARE REQUIRED AND PAID FOR UNDER OTHER ITEMS IN THE CONTRACT.

TRACE EXISTING SYMBOL WHERE EXISTING SYMBOLS ARE PLACED.

- 1 PLACE STOP BAR APPROXIMATELY 8 FEET IN ADVANCE OF THE GATE (IF PRESENT), BUT NO CLOSER THAN 15 FEET IN ADVANCE OF THE NEAREST RAIL. FIELD-FIT STOP BAR TO MAXIMIZE VIEW OF APPROACHING TRAIN.
- (2) 500' MINIMUM. MARKING LIMITS MAY BE EXTENDED AS DIRECTED BY THE ENGINEER TO MEET ADJACENT NO-PASSING ZONE MARKINGS.
- (3) FOR MULTIPLE TRACK CROSSINGS, THE BARRIER LINE SHALL EXTEND TO THE NEAR RAIL OF THE FURTHEST TRACK IN THE DIRECTION OF HIGHWAY TRAVEL.

#### DISTANCE TABLE

TABLE BASED UPON 2C-4 WISCONSIN SUPPLEMENT OF MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

POSTED SPEED (M.P.H.)	DIMENSION RANGE (FEET)
25	150 <sup><b>*</b></sup> - 250'
30	200 <sup><b>*</b></sup> - 300'
35	250 <sup><b>*</b></sup> - 450'
40	300 <b>*</b> - 500'
45	400 <sup><b>×</b></sup> - 650'
50	550 <sup><b>×</b></sup> - 800'
55	750 <del>*</del> - 1000'
60	1000 <sup><b>×</b></sup> - 1250'
65	1000 <sup><b>米</b></sup> - 1250'

★ THE MINIMUM DISTANCES IN THE TABLE ARE DESIRABLE AND SHOULD BE USED. THE DISTANCES MAY BE INCREASED UP TO THE MAXIMUM TO ALLOW FOR FIELD CONDITIONS SUCH AS THE CLOSED PROXIMITY OF DRIVEWAYS, BRIDGES, SIDE ROADS OR OTHER FEATURES THAT WOULD PROHIBIT THE MINIMUM DISTANCES FROM BEING USED.



6

6

5

3

C09-1

5

-

۵

ົ


### SIGNING AND PAVEMENT MARKING DETAILS FOR RAILROAD - HIGHWAY GRADE CROSSINGS

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION

APPROVED May 2023 DATE

/S/ Matthew R. Rauch STATE SIGNING AND MARKING ENGINEER

G

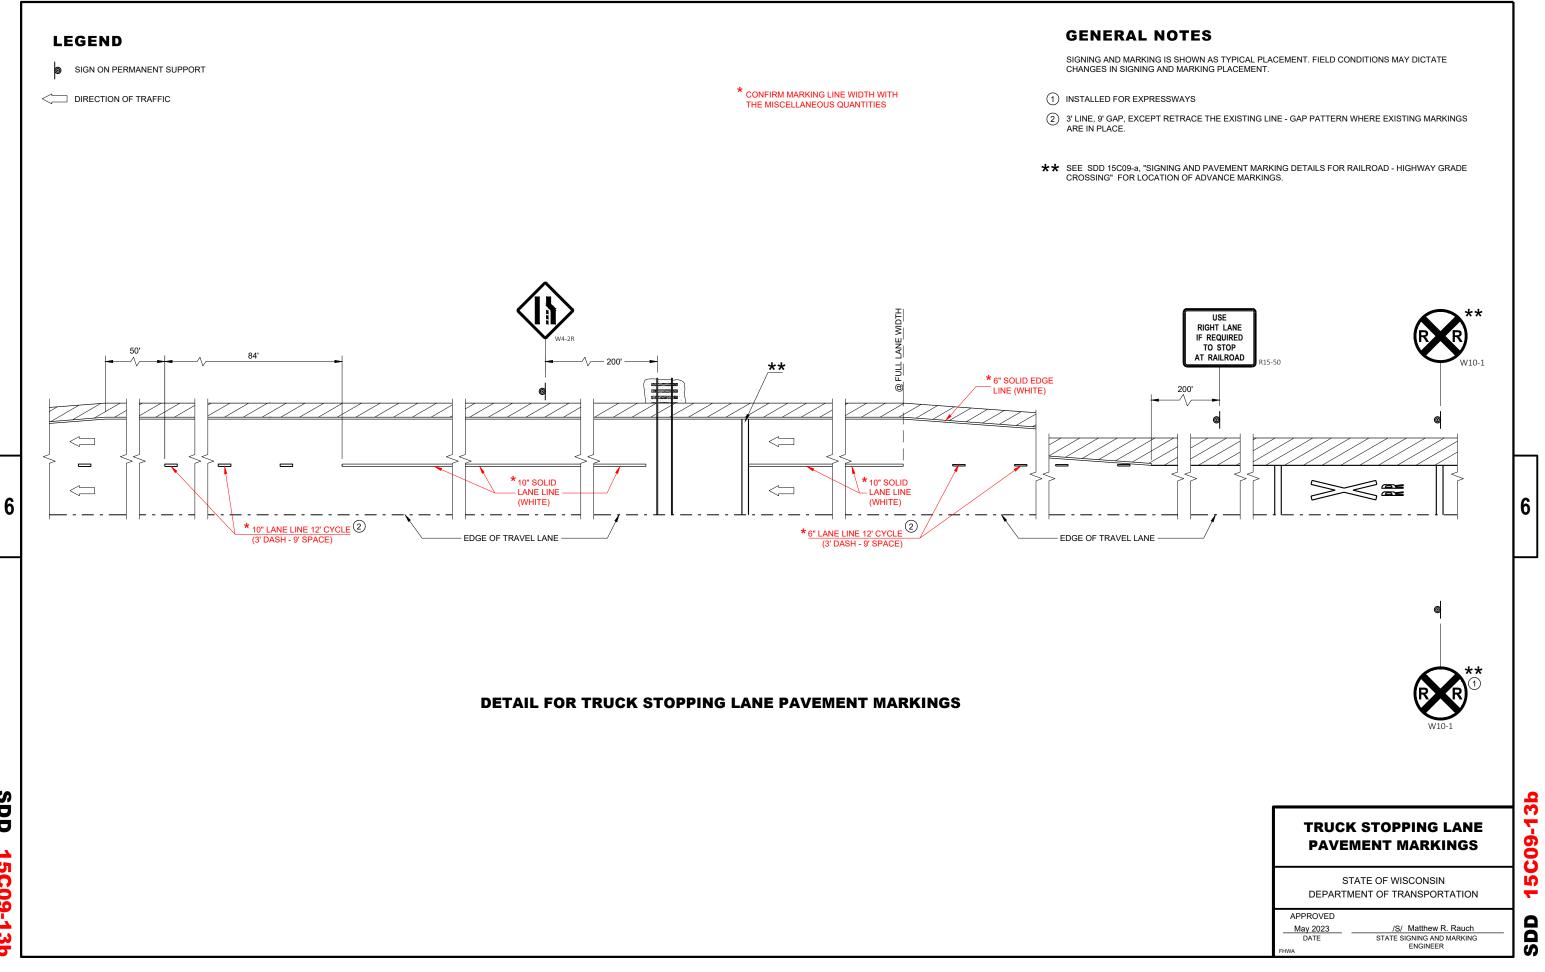

SDD **15C09-13b**